


DM1R 80 - 132 : IM B34 - Terminal box RHS

RHS = Terminal box Right Hand Side; RHS = Klemmenkasten Rechts; RHS = Boîtes à bornes sur le côté à droite; RHS = Caja de bornes derecha

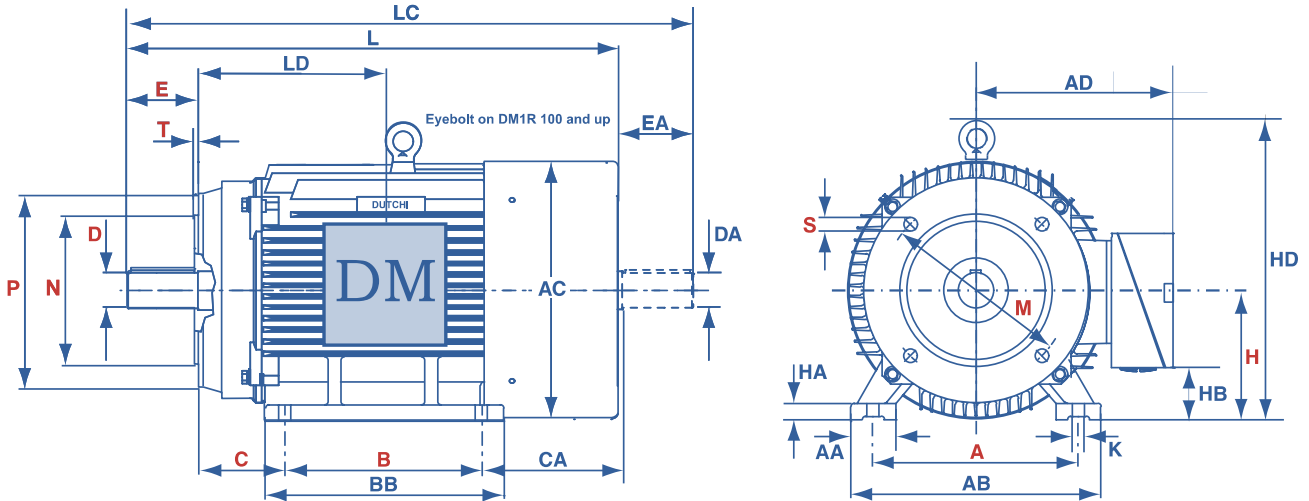


Flange measurements see DM1 80 - 132 : IM B14

Type	Poles	Dimensions in mm										Abmessungen in mm										Dimensions en mm										Dimensiones en mm									
		A	AA	AB	AC	AD	B	BB	C	CA	D	DA	E	EA	H	HA	HB	HD	K	L	LC	LD	Eye Bolt																		
DM1R 80 K/G	2 / 4 / 6 / 8	125	34	160	157	145	100	130	50	93	19j6	19j6	40	40	80	12	36	160	10	278	322	100	NO																		
DM1R 90 S		140		180	174	155		140	56	114	24j6	24j6	50	50	90		50	200		315	368	105																			
DM1R 90 L							125	165													340	393	119																		
DM1R 100 L/LX		160	40	200	195	180	140	176	63	117	28j6	28j6	60	60	100	14	55	240	12	375	438	131	M8																		
DM1R 112 M		190	45	230	220	190		180	70	134					112	17	60	262		399	463	145																			
DM1R 132 S/SX		216	55	262	256	210		191	89	161	38k6	38k6	80	80	132	18	65	315		465	548	165	M10																		
DM1R 132 M/MX							178	229												503	586	184																			

DM1L 80 - 132 : IM B34 - Terminal box LHS

LHS = Terminal box Left Hand Side; LHS = Klemmenkasten Links; LHS = Boîtes à bornes sur le côté à gauche; LHS = Caja de bornes izquierda

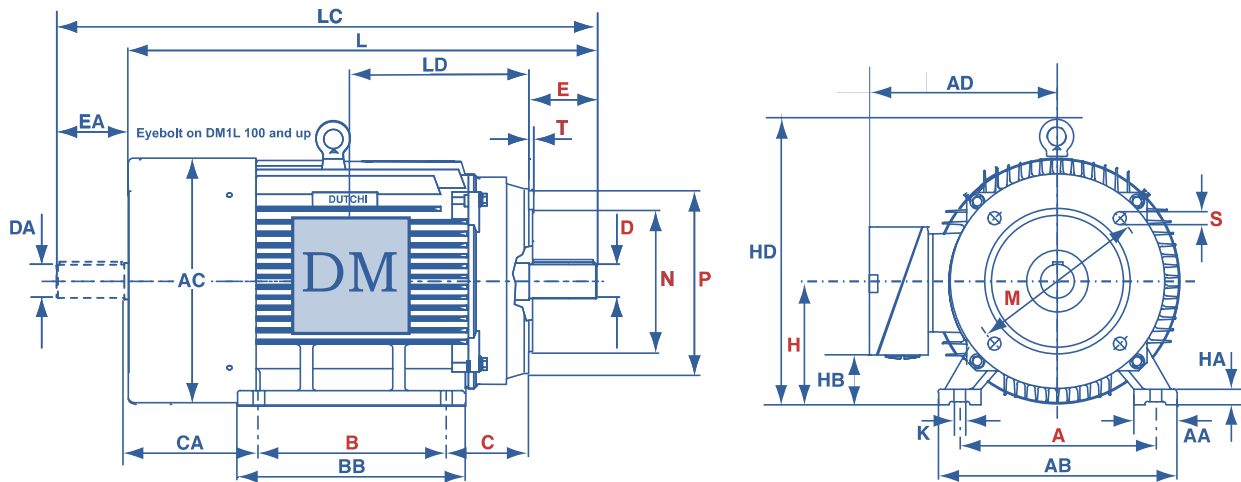

Flange measurements see DM1 80 - 132 : IM B14

Type	Poles	Dimensions in mm										Abmessungen in mm										Dimensions en mm										Dimensiones en mm									
		A	AA	AB	AC	AD	B	BB	C	CA	D	DA	E	EA	H	HA	HB	HD	K	L	LC	LD	Eye Bolt																		
DM1L 80 K/G	2 / 4 / 6 / 8	125	34	160	157	145	100	130	50	93	19j6	19j6	40	40	80	12	36	160	10	278	322	100	NO																		
DM1L 90 S		140		180	174	155		140	56	114	24j6	24j6	50	50	90		50	200		315	368	105																			
DM1L 90 L							125	165													340	393	119																		
DM1L 100 L/LX		160	40	200	195	180	140	176	63	117	28j6	28j6	60	60	100	14	55	240	12	375	438	131	M8																		
DM1L 112 M		190	45	230	220	190		180	70	134					112	17	60	262		399	463	145																			
DM1L 132 S/SX		216	55	262	256	210		191	89	161	38k6	38k6	80	80	132	18	65	315		465	548	165	M10																		
DM1L 132 M/MX							178	229												503	586	184																			